


# XLPE CHEMICAL HOSE



## SOLVENT HANDLING HOSE

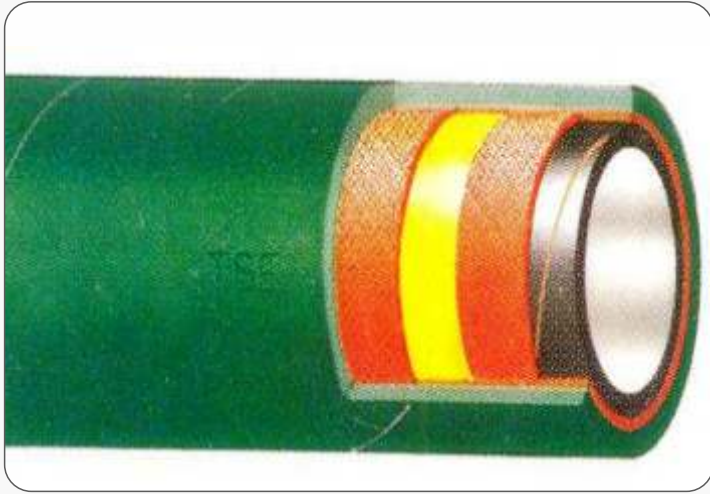

### Structure:

Inner Tube - XLPE (Cross linked Polyethelene) material.

Reinforcement - Textile reinforcement, steel wire helix and antistatic copper wire embedded between the plies.



Cover - Abrasion, heat, ozone, solvent and chemical resistant EPDM rubber.

### Applications:

Handling solvents like, toluene, zylene and other corrosive chemicals. Good resistance to Oils, Solvents and chemicals.

### Temperature Resistance:

-30°C to 90°C  
Steam cleaning up to +130° (Max 30 minutes)

		
int mm	out mm	W.P.Kg/cm <sup>2</sup>
25	41	14
32	44	14
38	52	14
50	66	14