

PVC STEEL WIRE HOSE

THUNDER HOSE - FOOD GRADE



Structure:

Suction and transport hose, inside outside smooth, tough and flexible, vacuum and compression resistance and with high axial strength

Material

Non toxic / Food Grade

Applications:


Vacuum lines of auto loaders (Plastic Processing, Dust collector), transport of Resin and Granules in plastic industry, conveying of low temperature food grade material and fluid in food processing and pharmaceutical industry, draining sewage and water. Used as oil drains for machineries.

Temperature range:

70°C

Colour:

Transparent

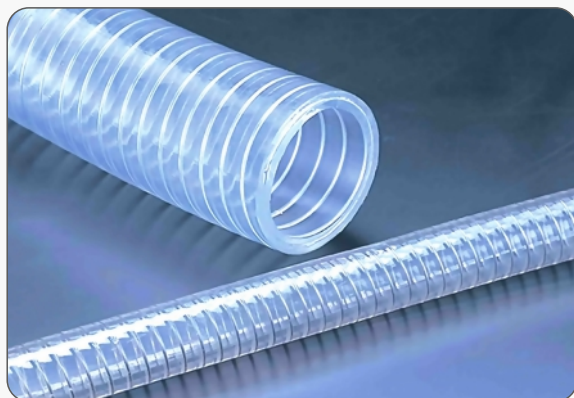

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhosesce@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in  +91-94 897 38 415

FLEXAFLEX HOSES INDUSTRIES
51, Dr. NANJAPPA ROAD
COIMBATORE - 641 018

PVC STEEL WIRE HOSE

THUNDER HOSE - FOOD GRADE



PVC Steel wire Hose

| int mm | out mm | mm | bar | mbar |
|--------|--------|-----|-----|------|
| 10 | 16 | 64 | 7.0 | 850 |
| 12 | 18 | 72 | 6.0 | 850 |
| 13 | 19 | 76 | 6.0 | 850 |
| 14 | 20 | 80 | 6.0 | 850 |
| 16 | 22 | 90 | 5.0 | 850 |
| 18 | 24 | 98 | 5.0 | 850 |
| 19 | 25 | 100 | 5.0 | 850 |
| 20 | 26 | 104 | 5.0 | 850 |
| 22 | 28 | 112 | 5.0 | 850 |
| 25 | 32 | 128 | 4.0 | 850 |
| 30 | 38 | 152 | 4.0 | 850 |
| 32 | 41 | 164 | 4.0 | 850 |
| 35 | 44 | 176 | 4.0 | 850 |
| 38 | 47 | 188 | 4.0 | 850 |
| 40 | 50 | 200 | 4.0 | 850 |
| 42 | 52 | 208 | 4.0 | 800 |
| 45 | 55 | 220 | 4.0 | 800 |
| 48 | 58 | 232 | 4.0 | 800 |
| 50 | 60 | 256 | 4.0 | 800 |
| 60 | 72 | 288 | 3.6 | 800 |
| 63 | 75 | 300 | 3.6 | 800 |
| 65 | 77 | 308 | 3.6 | 700 |
| 70 | 83 | 332 | 3.6 | 700 |
| 75 | 89 | 356 | 3.6 | 700 |
| 76 | 90 | 360 | 3.6 | 700 |
| 80 | 94 | 372 | 3.6 | 700 |
| 90 | 104 | 416 | 3.0 | 700 |
| 102 | 116 | 464 | 2.4 | 700 |
| 127 | 142 | 470 | 2.4 | 700 |
| 152 | 168 | 490 | 2.4 | 700 |
| 203 | 223 | 510 | 2.4 | 700 |


Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C)

Special Products

PVC Steel wire hose with ANT copper wire



PVC Steel wire Hose with Fabric Reinforcement

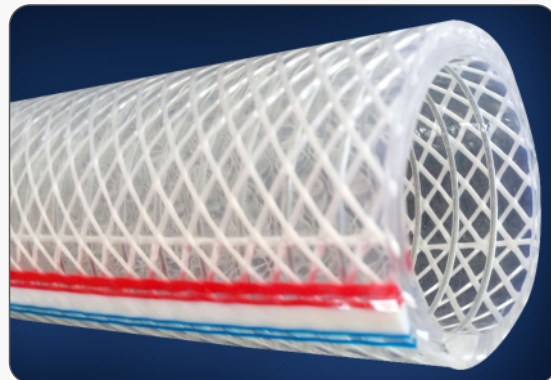

| int mm | out mm | W.P. bar | B.P. bar |
|--------|--------|----------|----------|
| 25 | 33 | 6 | 18 |
| 32 | 41 | 5 | 15 |
| 38 | 44 | 5 | 15 |
| 50 | 60 | 5 | 15 |
| 64 | 75 | 4 | 12 |
| 75 | 88 | 4 | 12 |
| 90 | 106 | 4 | 12 |
| 102 | 116 | 4 | 12 |

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhosesbe@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in +91-94 897 38 415

FLEXAFLEX HOSES INDUSTRIES
51, Dr. NANJAPPA ROAD
COIMBATORE - 641 018