

POLYESTER FABRIC HOSE - PVC COATED
UV RESISTANT



Temp. -20°C to 70°C



Light Duty

Structure:

PVC coated on both sides light polyester fabric hose / reinforced with medium heavy spring steel wire.

Wall Thick:

0.25 / 0.30 mm

Colour :

Grey

Temp. :

-20°C to 70°C

Compression Ratio :

10:1

Range :


50 mm to 600 mm ID

Standard Length:

10 Meter

Applications:

Conveyance of light duty air, dust, air conditioning and ventilation technology. For China Bale Plucker (Textile machinery) for screw road cover (conduit) etc.

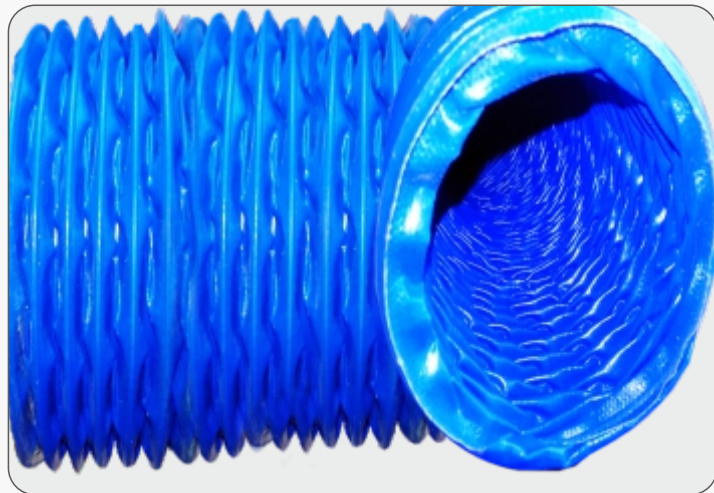

Heavy Duty

Structure:

Medium heavy polyester fabric hose - PVC coated on both sides - reinforced with heavy spring steel wire.

Wall Thick:

0.4 mm

Colour :

Blue / Black / Grey / Yellow

Temp. :

-20°C to 70°C

Compression Ratio :

10:1.5

Range :

38 mm to 1000 mm ID

Standard Length :

10/15 Meters

Applications :

Heavy dust, air blowing or suction, air conditioning and ventilation technology, Tumbler dryers, printing and lamination machines, low temp. welding fume extraction, Tea dryers, industrial food processing, UV Printing, pollution control and all other industrial applications.

Mob: +91-9843810577 | Phone : 0422 - 23 93 253 | 0422 - 23 93 453

Email : flexaflexhoses@be@gmail.com | pipe.agencies@gmail.com

www.flexaflexhoses.in | www.pipeagencies.in | +91-94 897 38 415

FLEXAFLEX HOSES INDUSTRIES
51, Dr. NANJAPPA ROAD
COIMBATORE - 641 018