


ALUMINIUM FOIL HOSE WITH INSULATION

Temp: -26°C to +150°C

Since 1990
FLEXAFLEX

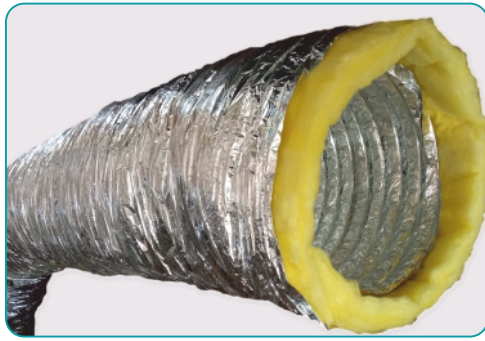

Structure:

Thermally insulated aluminium flexible air ducts are specifically produced for low and medium pressure heating, cooling, ventilation, exhaust and air conditioning systems.

Hose is produced from multi-layer aluminium and polyester, strengthened with high tension hard steel spring wire, surrounded with glass wool insulation and an aluminium vapour barrier.

Hose has high elasticity and flexibility. It can be easily fitted to circular, oval or rectangular connectors.

The fire of hose has been tested and certified by various international bodies.

Temperature Range:

-26°C to 150°C

Std. Length:

7.5 Meter

Range:

102 mm to 508 mm

Technical Properties

Types : Aluminium Foil

Fire Resistance: Difficult to Ignite

Inner Duct Construction: Aluminium + Polyester

Jacket Construction: Aluminium + Polyester

Air Velocity : 5000 FPM

Maximum Positive Pressure: 4" to 16" Dia. - 10" w.g. 18" to 20" Dia. - 6"

Maximum Negative Pressure: 0.8" w.g (All diameters)

Insulation : Glass Wool 25mm

Thermal Conductivity : $k=0.037$ W/mK

+91-98 438 10 577

+91-422 - 2393 253 & 453

flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018