


BULK MATERIAL SUCTION & DISCHARGE HOSE

Since 1990

FLEXAFLEX

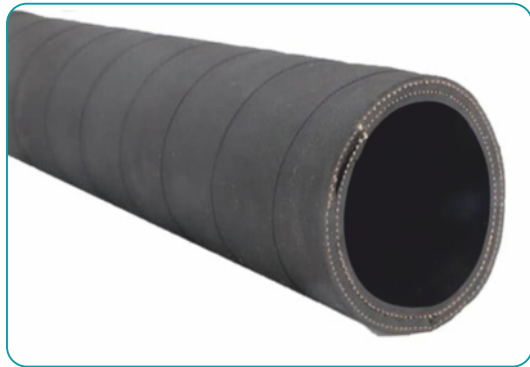

Structure:

Inner Tube: High wear & abrasion resistant seamless inner tube made from blend of natural & synthetic rubber

Reinforcement: Multiple plies of rubberized synthetic fabric and helical wire








Cover: Black, EPDM rubber resistant to ozone, weather, atmospheric degradation and abrasion.

Temperature range:

-30°C to +90°C

Applications:

Hardwall hoses used for handling/ conveying high abrasive dry bulk material in various industrial, mining, steel, cement & fertilizer industries.

 int mm	 Out mm	 mm	 mm	 VACUUM bar	 W.bar	 Std. Len. mtr
51.0	72.0	3.0	400.0	90%	12.0	20.0
63.0	85.0	3.0	500.0	90%	12.0	20.0
76.0	100.0	3.0	600.0	90%	12.0	20.0
102.0	126.0	3.0	800.0	90%	10.0	20.0
127.0	154.0	3.0	1150.0	90%	10.0	20.0
152.0	179.0	3.0	1400.0	90%	10.0	10.0
204.0	238.0	5.0	2000.0	90%	10.0	10.0
254.0	290.0	5.0	2500.0	50%	7.0	10.0
305.0	341.0	5.0	3000.0	50%	7.0	10.0
355.0	403.0	5.0	3500.0	50%	7.0	10.0
405.0	455.0	6.0	4000.0	50%	7.0	6.0
457.0	507.0	6.0	4500.0	50%	7.0	6.0
508.0	558.0	10.0	5000.0	50%	7.0	6.0
610.0	664.0	10.0	6000.0	50%	5.0	6.0
660.0	720.0	10.0	7000.0	50%	5.0	6.0
712.0	775.0	10.0	8000.0	50%	5.0	6.0

● All technical data are subject to dimensional tolerances of $\pm 0.5\%$.

● All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods.

We reserve the right to make technical changes and color deviations. Other versions are available upon request.

+91-98 438 10 577

+91-422 - 2393 253 & 453

flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018