

PVC COATED POLYESTER FABRIC HOSE

UV RESISTANT

Temp. -20°C to +70°C

Since 1990

FLEXAFLEX



Wall Thick: ▼

0.4 mm

Temp: ▼

-20°C to 70°C

Colour: ▼

Grey / Blue / Yellow / White / Black

Standard Length: ▼

10 Meters

Compression Ratio : ▼

10:1.5

Range: ▼

51 mm to 609 mm ID

Applications: ▼

Suitable for the conveyance of light-duty air in air-conditioning and ventilation system.


Structure: ▼

PVC coated on both sides light polyester fabric hose / reinforced with medium heavy spring steel wire.

Features: ▼

- ★ Light Weight Duct for Blower Applications
- ★ Compressibility ratio 10: 1.5
- ★ Compressibility allows for easy storage and transport
- ★ Resistant to UV Rays, Ozone
- ★ Water proof due to non porous fabric
- ★ Fire Retardant

Hose Size Inch	2"	2.5"	3"	3.25"	3.5"	4"	4.5"	5"	6"	7"	8"	9"	10"	11"	12"	13"	14"	15"	16"	18"	20"	22"	24"
Hose Size mm	51	63	76	83	90	102	115	127	152	177	203	228	254	279	305	330	355	381	406	457	508	558	609

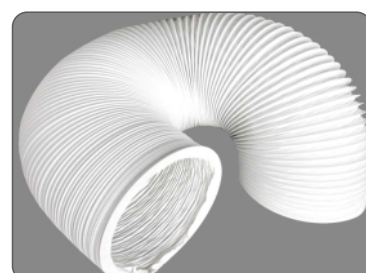

+91-98 438 10 577

+91-422 - 2393 253 & 453

flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018