

S.S. & M.S. Hose Clamp

Bridge / T-Bolt / Worm Drive

S. S. Bridge Clamp - L.H.S & R.H.S. Types



Product details:

Special clamp for attachment of exterior corrugated spiral hoses

Construction: stainless steel (VA).

Material: clamp band: stainless steel

Bridge: stainless steel

Screw: chrome-plated steel

Properties:


- ◆ practically leak-proof and firmly clamped with special bridge
- ◆ easily and quickly fitted geometry
- ◆ re-usable
- ◆ rust-proof
- ◆ very robust

Clamping Range

Min. Dia mm	Max. Dia mm
27	47
35	55
45	65
55	75
65	85
85	105
95	115
115	135
145	165
185	205
195	215
215	235
245	265
295	315
315	335
345	365



S.S. Bridge Clamp

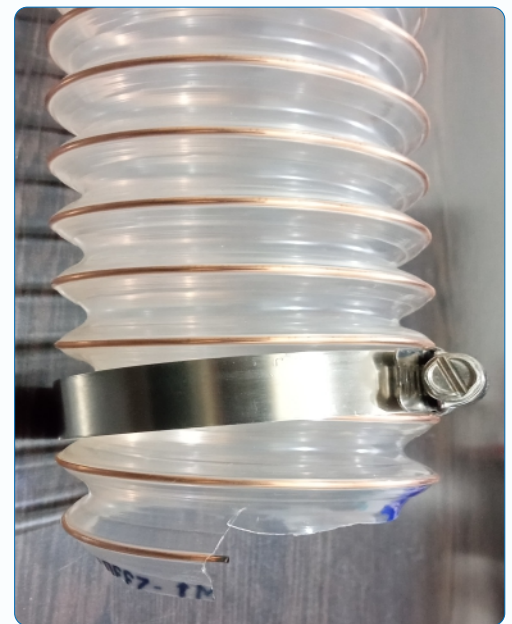

S.S. Worm Drive Clamp

S.S. & M.S. Hose Clamp

Bridge / T-Bolt / Worm Drive



S.S. 304 TBOLT CLAMP

- ◆ Broad bandwidth provides uniform clamping force.
- ◆ Nyloc nut prevents loosening due to any heavy vibrations.
- ◆ Adaptable to different hose diameters.

Standard: SAE J1508 Type "TB"



S.S. / M.S BOLT HEAVY TYPE
& O.H.T.C. HOSE CLAMP

Sizes are available as per enquiry.

Ordering Code	Min Dia mm	Max Dia mm	Ordering Code	Min Dia mm	Max Dia mm
28	44.5	50.8	110	109.5	117.5
32	47.8	55.6	112	111.1	119.1
34	49.2	57.2	116	114.3	122.2
36	50.8	58.7	124	120.7	128.5
38	52.4	60.3	132	127	134.9
40	54.1	62	134	128.6	136.5
42	55.6	63.5	140	133.4	141.2
44	57.2	65	142	134.9	142.9
48	60.5	68.3	144	136.5	144.5
52	63.5	71.4	146	138.1	146.1
54	65.1	73.0	148	139.7	147.6
56	66.8	74.7	156	146.1	153.9
60	69.9	77.7	164	152.4	160.3
64	73.2	81	168	155.6	163.5
68	76.2	84.1	172	158.8	166.6
72	79.5	87.4	174	160.3	168.3
76	82.6	90.4	180	165.1	173
78	84.1	92.1	188	171.5	179.3
80	85.9	93.7	196	177.8	185.7
84	88.9	96.8	204	184.2	192
88	92.2	100.1	212	190.5	198.4
92	95.3	103.1	220	196.9	204.7
96	98.4	106.4	228	203.2	211.1
100	101.6	109.5	236	209.6	217.4
104	104.8	112.7	244	215.9	223.8
108	108	115.8			

Additional sizes are available as per enquiry.



WORM DRIVE SERRATED CLAMP

- ◆ Stainless and carbon steel material
- ◆ Trivalent & hexavalent passivated zinc plating
- ◆ useful for soft hose applications.

Standard: BS5315



STAINLESS STEEL WORM DRIVE CLAMP

- ◆ Non- throbbing surfaces
- ◆ Clean punched perforations
- ◆ Application ranging from domestic to heavy industries.

Standard: SAE J1508 Type "F"

Ordering Code	Size mm	Min Dia mm	Max Dia mm	Ordering Code	Size mm	Min Dia mm	Max Dia mm
000	12	9	12	110A	110	90	110
00M	16	12	16	5	115	95	115
00	20	14	20	5X	120	100	120
0	22	16	22	6	130	110	130
100S	25	18	25	140A	140	125	140
0X	28	20	28	575S	145	125	145
1A	30	22	30	6X	160	140	160
137S	35	25	35	7	180	160	180
1	38	30	38	8	200	180	200
1X	40	30	40	9	230	205	230
45A	45	32	45	10	250	230	250
2A	50	38	50	11	280	260	280
2	55	42	55	12	300	280	300
2X	60	45	60	13	330	305	330
3	70	50	70	14	356	330	356
75A	75	55	75	15	375	354	375
3X	80	60	80	16	400	375	400
4	90	70	90	18	450	425	450
4X	100	80	100				

Additional sizes are available as per enquiry.

+91-98 438 10 577

+91-422 - 2393 253 & 453

flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018