


PVC GRIT HOSE

Since 1990

FLEXAFLEX

Temp: -10°C up to +60°C

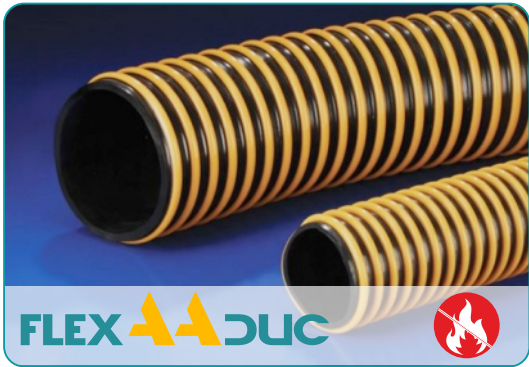

Structure:

Wall: Soft compound abrasion PVC + Rubber

Spiral: Hard PVC

Material: Soft compound abrasion PVC and rigid PVC Helix

Properties:

★ Highly abrasion-proof

★ Pressure resistant

★ Very robust

★ Flame-retardant according to UL94-HB




Temperature range:

-10°C up to +60°C approx

Applications:

★ Suction and discharge for sand, grains, gravel, cement and iron

★ Transfer of various powder and granules

 int. mm	 Out. mm	 mm	 W.bar	 kg/m	 Std. Len. mtr
38	52	-	7.00	-	20
51	68	-	6.00	-	20
63	80	-	6.00	-	20
76	98	-	6.00	-	20
102	130	400	5.00	2.9	20
127	158	-	4.00	-	15
152	183	600	3.00	4.3	15

● All technical data are subject to dimensional tolerances of $\pm 0.5\%$.

● All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. We reserve the right to make technical changes and color deviations.

● Further diameters upon Bulk order request

+91-98 438 10 577

+91-422 - 2393 253 & 453

flexaflexhoses@scbe@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018