

SILICON DOUBLE LAYER HOSE

Since 1990

FLEXAFLEX

Temp: 300°C



Structure:

Double layer Silicone Duct Hose is made of two layers of silicone coated glass fiber fabric and reinforced between the layers with heavy spring steel wire. Glass cord on the outside surface.

Wall Thickness:

0.8 mm / 1 mm

Temperature range:

-70 °C to +300°C

Colour:

Red

Std. Length:

4 Meters (On request 1 mtr | 2 mtr | 2.5 mtr | 3 mtr | 5 mtr)

Applications:


Hot air suction, extraction and blow - for ceramic kiln inlet/outlet hose, Plastic raw material dryers, Flexographic-Rotogravure & Offset Printing Machine, yarn drying units, Plastic processing industry, packaging industry, blown film plants, and also for lamination and coating, carrying dusty particle at high temperatures.








1mm wall thick
(Hot PET Conveyance)

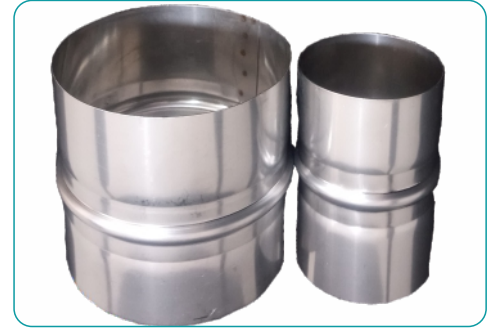

Moulded Coplers








Hose Connector

 int mm	 Out mm	 mm	 bar	 bar
25	28	18	2.800	0.710
32	35	20	2.700	0.650
★ 35	38	22	2.650	0.630
★ 38	41	24	2.600	0.600
40	43	26	2.600	0.600
★ 42	45	26	2.600	0.590

SILICON DOUBLE LAYER HOSE

Temp: 300°C


 int mm	 Out mm	 mm	 bar	 bar
★ 44	48	27	2.600	0.580
45	49	27	2.600	0.580
★ 50	54	31	2.600	0.520
51	55	31	2.600	0.520
★ 57	61	34	2.500	0.480
60	64	34	2.500	0.480
63	67	37	2.400	0.460
★ 70	75	40	2.100	0.440
76	81	43	2.100	0.430
80	85	45	2.100	0.420
83	88	47	2.100	0.410
★ 89	94	50	2.000	0.400
102	107	56	1.900	0.350
★ 108	113	60	1.800	0.330
★ 110	115	60	1.800	0.330
★ 115	120	63	1.500	0.300
127	133	70	1.500	0.230
★ 141	147	76	1.300	0.200
★ 150	156	82	1.200	0.170
152	158	82	1.200	0.170
★ 159	165	86	1.100	0.160
★ 164	170	89	1.100	0.140
★ 169	176	89	1.100	0.140
★ 180	187	95	1.000	0.120
203	210	108	0.700	0.090
254	261	133	0.500	0.070
305	312	159	0.500	0.070

● All technical data are subject to dimensional tolerances of $\pm 0.5\%$.

● All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max.operating pressures apply only for short periods. We reserve the right to make technical changes and color deviations.

★All These sizes are not in our ready stocks. Can be arranged on bulk orders.

●Further diameters upon Bulk order request

 +91-98 438 10 577

 +91-422 - 2393 253 & 453

 flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018