


THERMOPLASTIC RUBBER HOSE

TPR HOSE

Temp: 135°C

Since 1990
FLEXAFLEX

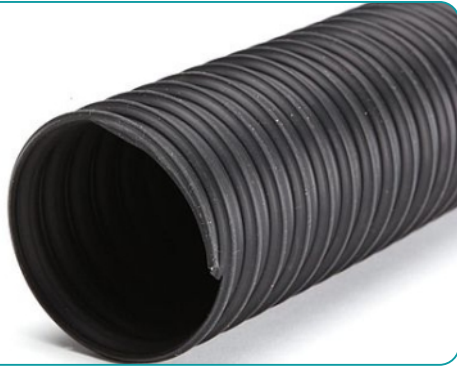

Structure:

Hose made of Thermoplastic rubber (PP / EPDM Rubber blend) and reinforced with PP coated spring steel wire. A wide range of molded CUFFs available.

Characteristics:

Light and highly flexible hose, stable at high temperatures, good chemical resistance and good ozone resistance.

Temperature range:

-40°C to +135°C (short term up to +150°C)

Colour:

Black

Applications:

Air intake for air compressor and automotive engines, engine silencer emission clearance in workshops, chemical and ventilation industry, laundry machine dryers. Ideal for cold and hot air supply in multilayer film plants, offset printing presses like Heidelberg, Komori, Fujifilm, ManRoland Kba, Bobst, Muller Martini etc.

Specials:

K1H -XS -TPR - UL with UL -Certifications (Flame retardant).

K1H -XS -TPR - VO Highly Flexible flame retardant hose according to UL 94-VO



 int mm	 out mm	 mm	 mm	 bar	 mbar
★ 10	15.6	0.65	10	1.0	600
12	17.6	0.65	12	1.0	600
★ 14	19.6	0.65	14	1.0	600
16	21.6	0.65	16	1.0	600
★ 18	23.6	0.65	18	1.0	600
20	25.6	0.65	20	1.0	600
25	30.6	0.65	25	0.9	550
★ 26	31.6	0.65	26	0.9	550
30	35.6	0.65	30	0.9	550
32	37.6	0.65	32	0.9	550
★ 35	40.6	0.65	35	0.9	550

THERMOPLASTIC RUBBER HOSE

TPR HOSE

 int mm	 out mm	 mm	 mm	 bar	 mbar
38	43.6	0.65	38	0.9	550
40	45.6	0.65	40	0.9	550
45	50.6	0.65	45	0.9	550
★ 48	54.0	0.65	48	0.9	550
★ 50	56.0	0.65	50	0.7	550
51	57.0	0.65	51	0.7	500
★ 55	61.0	0.65	55	0.7	500
60	66.0	0.65	60	0.7	500
63	69.0	0.65	63	0.7	500
★ 70	76.4	0.65	70	0.7	500
75	81.4	0.65	75	0.7	500
80	87.0	0.65	80	0.7	500
90	97.0	0.65	90	0.7	500
★ 100	107.0	0.65	100	0.5	450
102	109.0	0.65	102	0.5	450
110	117.0	0.65	130	0.5	450
120	127.0	0.65	150	0.5	450
★ 125	132.0	0.65	175	0.5	450
127	134.0	0.65	180	0.5	450
130	138.0	0.65	180	0.4	200
140	148.0	0.65	185	0.4	200
150	158.0	0.65	190	0.4	200
160	168.0	0.65	195	0.4	200
175	183.0	0.65	205	0.4	200
180	188.0	0.65	220	0.4	200
200	208.0	0.65	250	0.2	150
250	258.0	0.65	330	0.2	150
300	308.0	0.65	420	0.1	100

● All technical data are subject to dimensional tolerances of $\pm 0.5\%$.

● All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances.

Max.operating pressures apply only for short periods. We reserve the right to make technical changes and color deviations.

★ All These sizes are not in our ready stocks. Can be arranged on bulk orders.

☎ +91-98 438 10 577

☎ +91-422 - 2393 253 & 453

✉ flexaflexhoses@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018