


PVC BRAIDED HOSES - TRANSPARENT

Since 1990

FLEXAFLEX

(HEAVY DUTY)

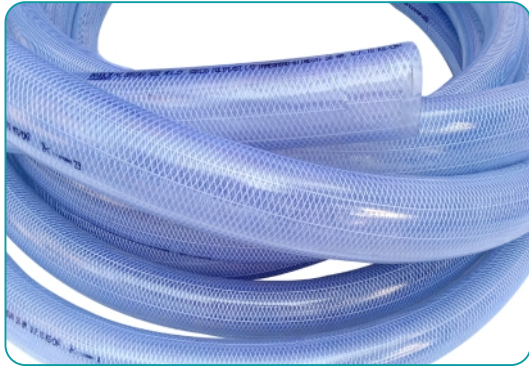

Structure: ▼

Heavy duty hose which is made of special grade oil and chemical resistant PVC, reinforced with top quality nylon (twisted) yarn which assures better working pressure and temperature.

Range: ▼

6 mm ID to 75 mm ID

Temperature range: ▼

70°C

Color: ▼

Transparent






Applications: ▼

- ◆ Industrial Air Compressors - Air/Pneumatic Hoses.
- ◆ Steel Mills / Metal Casting Units.
- ◆ Cooling lines of induction Furnaces.
- ◆ Jack Hammer Hose for Drilling.
- ◆ Dyes and Chemical Handling.
- ◆ Bore Well Cleaning
- ◆ Suction and Delivery hose for Mine dewatering
- ◆ Heavy Duty Water hose for Projects like Thermal Power Plants and other engineering Sites.
- ◆ Water hose for Plantations.
- ◆ Marine and ship building.
- ◆ Diesel and Edible oil handling.
- ◆ Plastic Raw Material handling.
- ◆ Vacuum Lines.
- ◆ Piling work in building construction




 int mm	 Size - inch	 mm	 bar	 Std. Len. mtr
6	1/4	3.0	25	50/100
8	5/16	3.0	25	50/100
10	3/8	3.5	25	50/100
12	1/2	3.5	20	50/100
16	5/8	3.5	20	50/100
20	3/4	4.0	20	50/100

PVC BRAIDED HOSES - TRANSPARENT (HEAVY DUTY)

 int mm	 Size - inch	 mm	 bar	 Std. Len. mtr
25	1	4.8	15	50/100
30	1. 1/4	4.8	15	30/50/100
40	1. 1/2	5.0	15	30/50/100
50	2	6.0	10	30/50
63	2.1/2	7.0	7	15/30
75	3	8.5	6	15/30

● All technical data are subject to dimensional tolerances of $\pm 0.5\%$.

● All technical data, measured at 23°C, are general orientation values and are subject to production-related tolerances. Max. operating pressures apply only for short periods. We reserve the right to make technical changes and color deviations. Other versions are available upon request.

 +91-98 438 10 577

 +91-422 - 2393 253 & 453

 flexaflexhoses@scbe@gmail.com

www.flexaflexhoses.in

FLEXAFLEX HOSES INDUSTRIES

51, Dr. NANJAPPA ROAD COIMBATORE - 641 018